

- 1 -

SIGNAL REGENERATION

The present invention relates to signal regeneration. More specifically, the invention relates to the regeneration a transmitted signal, particularly, but not exclusively, of the signal type transmitted by cellular base stations, said
5 signals being used in mobile, or cellular, telephone network systems.

Mobile telephone systems usually comprise a network of base stations. Signals are transmitted to/from mobile handsets of a user (subscriber) in order to provide telephone and other services.

The operational range of base stations, in the aforementioned mobile or
10 cellular telephone network systems, is typically 10 to 20 kilometres (km).

Typically such signals transmitted by base stations are of the order of a few tens or even hundreds of Watts. The frequency of the signals is usually in the low microwave region of the electromagnetic spectrum, typically around the 1GHz to 2GHz range. This range of frequencies is found in GSM mobile
15 telephone networks. However, it will be appreciated that the operational range of frequencies may be different in other signal transmission/broadcasting systems.

Other systems to which this technique may be applied include: for example, digital audio broadcasting (DAB) systems, coded division multiple
20 access (CDMA), Quadrature Phased Shift Keying (QPSK) communication systems, High Performance Radio Local Area Networks (HIPERLAN); and Universal Mobile Telecommunication Systems (UMTS) telephone networks.

It is important that the structure of transmitted signals within the aforementioned and other systems is such that the signal structure has known,
25 predefined characteristics and contains synchronisation sequences or bursts, training sequences etc.

Such sequences are often generated from pseudo-random codes, which have a good auto correlation functions. Correlation techniques are therefore widely used in GSM and similar communications systems to perform signal
30 synchronisation, detection and other signal processing tasks.

- 2 -

In order to regenerate an accurate replica of a transmitted signal in a receiver, it is necessary to remove any errors that are present and/or compensate for any degradation that occur during transmission. Errors and signal degradation occur during transmission of any signals, and may arise as a result of: signal attenuation and fading; multi-path reflection/multi-path dispersion; background noise; interference by other signals; or a combination of these and other effects. All the effects, to varying degrees, reduce the efficiency and performance of systems that use transmitted signals.

A common theme of many systems that utilise signals, for example to locate a mobile user, is that an accurate indication or replica of the transmitted signal is needed.

There are certain techniques that can help to correct or modify a received signal so that certain types of errors could be corrected or compensated. However, in the past, such regenerated signals often had residual errors.

WO-A-01/28272 describes a system for determining the position of a base station within a cellular transmission network. Field strengths from adjacent base stations are measured and information relating to these is used to provide a fix on a mobile transmitter within the cell of the network. The position is based upon identifying signal strengths and by performing a best-fit match to data when overlaid on a geographical map. No attempt is made to reconstruct or regenerate a signal.

It is generally an aim to reduce all forms of signal degradation and noise. GB-A-2 291 300 describes a method of determining whether a vehicle is travelling on a predetermined path by comparing signal strength from a base station of a mobile telecommunication system over a period of time normalising the signal and comparing this with stored signal strength versus distance information. Again, as part of the determination process an indication of the transmitted signal is desirable. However, no attempt is made at deriving such a signal.

- 3 -

Another technique of improving signal quality or reducing noise is to orient an antenna at signal source and phase lock the antenna to the frequency of the signal. However, this is not always practicable, particularly where there is restricted line of sight and/or where signal reflections occur.

5 GB-A-2 311 697 discloses a technique for estimating the position of a mobile station in a wireless communication system using signal strengths from a plurality of base stations. These signal strengths are correlated with measurements previously obtained at a plurality of known positions. The resultant data is used to correct the received signals to provide an indication of
10 the position of a mobile station.

It is an object of the present invention to provide a method and apparatus for receiving a signal, and to recover, from the received signal, a regenerated signal for the purposes of comparison or otherwise.

According to one aspect of the present invention, there is provided a
15 method of regenerating a remotely transmitted signal comprising a symbol stream modulated onto a carrier in accordance with a predetermined standard, the method including the steps of:

- a) receiving the remotely transmitted signal having known characteristics;
- 20 b) determining frame timing of the received signal;
- c) identifying the locations of sequences within the signal from the frame timing;
- d) identifying the structure of the sequences;
- e) estimating phase shift values at the locations of the sequences;
- 25 f) demodulating the symbol stream using the estimated phase shift values and the structure of the sequences; and
- g) remodulating the symbol stream using the phase shift values.

Advantageously, step f) comprises the additional step of correcting the symbol stream prior to step g). Various techniques may be used to effect the

correction. Additionally, the step of correcting the symbol stream may incorporate substitution of symbols in the symbol stream where the symbol stream is known *a priori*.

Step f) may further comprise comparing demodulated symbols with
5 known symbols to provide an estimate of the symbol error rate.

It is preferred that step a) includes down converting the received signal to a nominal 0Hz intermediate frequency. Additionally, step a) further includes digitising the intermediate frequency signal to provide a digitised symbol stream in a complex signal domain.

10 Preferably, step e) includes estimating mean beat frequency of the signal, removing the estimated mean beat frequency from the signal and storing the mean beat frequency in a database. Additionally, step e) further includes estimating residual phase shift of the signal and storing the estimated residual phase shift of the signal in the database.

15 Ideally, the sequences include training sequences, synchronisation signals, frequency correction bursts, or dummy bursts. The training sequences may include eight training sequences associated with data bursts as well as a ninth training sequence associated with dummy bursts.

It is possible to use training sequences and correlation peaks for multi-
20 path compensation. Channel estimation techniques using correlation processing of data sequences are preferably used to provide the multi-path compensation.

Regeneration of the signal is conveniently performed at zero beat frequency using digital signal processing techniques to achieve high
25 performance and fidelity at low implementation cost. However, other techniques may be employed to achieve the desired result.

By providing for regeneration of a transmitted signal, it is possible to utilise a signal received from a remote source, even though the received signal may have been subjected to corruption over its propagation path. Therefore,
30 preferably, the regenerated signal that is obtained is substantially identical to

the transmitted signal, or one that would have been obtained from a transmitter, if a high quality connection (landline) had been used to propagate the signal to the receiver.

Most preferably regeneration of the received signal is achieved by a selective combination of: reconstructing portions of the received signal, by
5 correcting the detected departure from the known form; and by other techniques for removing errors and reducing noise.

Apparatus may also be provided for regenerating a signal. Such apparatus may comprise elements that (i) enable a digital sample stream at
10 nominal zero beat frequency in the complex signal domain to be produced from the received signal, (ii) determine a mean beat frequency shift in the nominal zero beat frequency signal, (iii) determine residual phase shifts over the span of the nominal zero frequency signal after the mean beat frequency shift has been removed, (iv) provide a mean beat frequency correction factor and residual
15 phase shift correction parameters, (v) compare portions of the received signal with corresponding known signal forms, (vi) correct corrupted portions of the received signal to provide reconstructed signal portions, (vii) recombine the reconstructed signal portions with the mean beat frequency and residual phase shifts to provide a regenerated signal at the nominal zero beat frequency.

Periodic timing information may then be extracted and used in
20 conjunction with phase shift measurements to provide an estimate of the relative mean beat frequency offset and residual "noise-like" phase shifts between the received signal and a stable local oscillator. Ideally, phase information is used to provide the mean beat frequency and residual phase shift
25 correction parameters.

Once any mean beat frequency and residual noise-like phase shifts and have been corrected, demodulation of the signal bit-stream can be performed to provide a stream of demodulated symbols in which various techniques may be applied to correct symbol errors. Some preferred techniques are described
30 below.

- 6 -

Typically, for GSM systems, the received signal is in the region of 900MHz to 1800MHz and is mixed to an intermediate frequency prior to Nyquist filtering and digitising to produce symbol streams at nominal zero beat frequency in the complex signal domain. Other embodiments may be employed to achieve equivalent results.

Using the method of the present invention described generally above, a signal is obtained which is typically as near a replica of the transmitted signal at nominal zero beat frequency as is possible to achieve, without using a hard wire connection from the original source of the transmitted signal. Thus a regenerated nominal zero beat frequency signal is obtained which may be stored and, for example, against which comparisons may be subsequently made.

In the simplest embodiment of demodulation of the beat frequency and phase-corrected version of the nominal zero beat frequency signal, demodulated data (symbols), derived from the received signals, are hard limited. This has the effect of removing most of the interference that may be present, provided that the wanted signal is significantly larger than the interference, which is usually the case for the applications of interest. Other more sophisticated demodulation techniques may also be applied.

The appropriate modulation is then applied to demodulated symbols and the previously measured mean beat frequency and residual phase shift correction parameters are applied to create a regenerated signal at the nominal zero beat frequency, uncorrupted by multipath reflections, interference or by other effects due to "over the air" propagation.

More sophisticated decoding, e.g. Viterbi decoding, may be applied (for example, in data bursts) for recovering some data sequences. Other data symbol sequences are reconstructed using prior knowledge of the structure of the signal (for example synchronisation sequences and bursts previously identified by the signal processing functions as GSM dummy bursts).

Use of *a priori* knowledge of a signal structure can also be used to provide an estimate of the Bit Error Rate (BER) from the number of data

corrections that are needed in order to reconstruct a signal. The portions of the signal that can be reconstructed using *a priori* knowledge include, for example, for GSM, a training sequence, a synchronisation (sync) signal, a so-called dummy signal or Frequency Correction Bursts (FCBs). Such *a priori* knowledge
5 may be obtained from databases or look-up tables of characteristics of the signals that are published as standards.

Other signal degradations may also need to be corrected or compensated for when regenerating the transmitted signal. One such signal degradation is called multi-path dispersion. Multi-path dispersion occurs as a
10 result of reflections from buildings, trees, moving objects and other geographical features. For example, a training signal sequence may occur in the middle of each data burst in order to provide a means of estimating the multi-path dispersion characteristics. Once computed, the estimate may be used to correct for such multi-path dispersions.

15 Active data bursts may contain data relating to call handling/routing instructions, phone operator commands, data relating to base station control and user information, as well as payload data *per se*.

Conventional GSM receivers decode information from a carrier signal to establish which bursts contain data relevant to them, and which of the possible
20 set of training sequences is currently in use to characterise those bursts. Bursts containing no data are filled with a 'dummy' code and are not subsequently processed by conventional receivers. It has been realised that by utilising all data bursts, including dummy signals, that it is possible to regenerate a high quality reference signal which is a very close replica of what was transmitted,
25 because the vast majority of the received signal can be processed to estimate the mean beat frequency and residual phase shifts on a burst-by-burst basis. For occasional bursts where this is not possible or convenient (for example the Frequency Correction Bursts), simple interpolation is conveniently applied.

Information derived from training sequences enables the structure of a
30 received signal to be deduced; and relevant correction factors to be generated.

- 8 -

Comparison with known signal structures is made and substitution of corrupted data effected by using correct data derived from, for example, look-up tables.

In a typical GSM system there are eight different training signal sequences which may be used in live data bursts to distinguish signals from various base stations and minimise interference due to frequency re-use.

The amount of GSM data traffic varies, particularly from low use to peak periods. During low use periods base stations are relatively inactive and transmit so called dummy bursts of data. These signals are used, in a preferred embodiment of the present invention, in order to obtain phase and frequency information in the same way as active data bursts, by treating the centre of the dummy burst effectively as an additional training sequence. Thus dummy bursts, containing no data, may be considered as containing a ninth training sequence.

Preferably the apparatus may be adapted to use a central portion of a dummy burst as a datum for correlation and phase noise measurement.

Thus use of the information enables the phase and frequency of an incoming signal, relative to the receiver oscillator, to be obtained, operating in the complex signal domain at the nominal zero beat frequency of the receiver. The measured phase variation between oscillators, transmitting and receiving the signals, can then be obtained. This information may be analysed and can be used to express the phase variation conveniently as a mean beat frequency and residual "noise-like" phase shift over the signal span of interest. Both mean beat frequency and any residual phase shifts are derived from the output of the burst detection and correlation process.

Ideally for received GSM bursts, a correlation test is performed using all training sequences including the appropriate portion of the dummy burst. The signal giving the largest magnitude is usually then selected. This enables the burst type to be uniquely identified (for example, dummy or data burst and the appropriate training sequence in use for the latter). The phase of the data burst relative to the receiver oscillator can then be derived from 'in phase' (I) and 'phase quadrature' (Q) outputs of the complex signal domain correlator.

Dedicated synchronisation ('sync') sequences are initially used to establish frame timing data. Frame timing and other necessary signal structure information can then be established.

Ideally periodic timing information includes frame timing information. In
5 GSM systems, initial frame and burst timing is advantageously obtained by a correlation search for a pattern of main synchronisation burst. Phase and frequency offset information is then obtained by correlating, preferably, for example by using a central section of a selected GSM signal or data burst, with stored versions of permitted modulation patterns for those signals or data
10 bursts. Comparison may be made with stored values held in a database or look-up table.

Preferably frame timing of signals is obtained by using a correlator. The correlator identifies GSM synchronisation sequences from a received signal. Typically, the main GSM synchronisation or 'sync' sequence is 64 symbols in
15 length.

A computer, dedicated Digital Signal Processing (DSP) chip, Field Programmable Gate Array (FPGA) or Application Specific Integrated Circuit (ASIC) is ideally used in order to perform the aforementioned tasks. An advantage of digital techniques is that higher fidelity signal processing can be
20 achieved in comparison with analogue methods.

In order to further enhance signal reconstruction a measurement of phase shift is made on received signals. This is used to improve the signal reconstruction process by allowing for any frequency offset and phase shift that may have occurred. A compensation factor for any frequency error and phase
25 shift may then be computed. The compensation factor is used to compensate for the following errors, which are conveniently defined as follows:

(i) a mean beat frequency (which is the mean frequency difference between transmitted and received oscillators over a predetermined period, measured with respect to the nominal zero beat frequency of the receiver); and

- 10 -

(ii) any residual "noise-like" phase shifts (that are due to relative short term signal frequency fluctuations over a predetermined period) between transmitted and received oscillators.

Errors are removed as signals are generated as and when the need arises, so that a complete signal can subsequently be reconstructed. An erasable dynamic memory or cache can be used for this purpose.

Regeneration of the reference signal can then take place, ideally in the digital domain, for example under control of a microprocessor. Signal regeneration relies upon the fact that some portions of the signal have been measured directly, reconstructed and estimated. The regeneration apparatus therefore effectively comprises: a signal processor and associated memory operating under the direction of software, programmed to perform assigned or specific functions, each of which is described in greater detail below.

For a better understanding of the present invention, reference will now be made, by way of example only, to the accompanying drawings in which:-

Figure 1 is a diagrammatic representation of a cellular communication system;

Figure 2 is a block diagram illustrating a signal regeneration system in accordance with the present invention;

Figure 3 is a table of results from a trial using the system of Figure 2; and

Figure 4 is a graph of the residual phase shift measurement against burst number within a signal.

Referring initially to Figure 1, there is shown in diagrammatic form, a network-10 with base stations 12A to 12J, in a cellular communication system. A receiver, such as a mobile handset 14, receives signals from several base stations 12E, 12F, 12G, 12I and 12J. Received signals generally are superimposed with noise; may include errors and are often accompanied by unwanted (spurious) signals. The received signal may be converted to a zero beat or to an intermediate frequency (IF) signal, filtered, digitised and processed

in terms of in-phase (I) and quadrature (Q) sample streams. Other techniques may be used.

Where appropriate interference may be reduced by focussing the antenna of the mobile handset 14 on a desired base-station to utilise any
5 directive gain characteristics. Although this serves to reduce interference and multi-path fading effects further interference and multi-path reduction techniques are required to improve the ultimate quality of the received signal.

Signal 20 (Figure 1) is received from base station 12J by mobile handset or other suitable receiver 14 and is of the type found in a GSM cellular
10 communications system. The received signal 20 so obtained is generally corrupted by multi-path dispersion and interference effects, for example, from other base stations. In order to obtain a high quality version of the signal that was originally transmitted, regeneration of the transmitted signal from what the received signal is necessary. This will now be explained in greater detail below,
15 with reference to Figure 2.

The received signal is down converted and processed to provide separate, digitised I and Q sample streams at zero beat frequency. The I and Q sample streams form a complex signal 100 (Figure 2) that is subsequently processed in a signal regeneration system in accordance with the present
20 invention.

The mean beat frequency and residual "noise-like" phase shifts and arise as a consequence of a frequency mismatch and drift between stable oscillators in the receiver and the transmitter, and represent a convenient approach to representing, measuring and processing such frequency mismatches and drifts.

Referring now to Figure 2, a signal regeneration system 200 is shown
25 which comprises a signal correlator 24, a frame and burst timing correlator 28, a residual phase shift correlator 30, a frequency mixer 32, a database (or look-up table) 34, a demodulator 40, a mixer 42, a bit error corrector 46, a GSM modulator 48 and a remodulator 50. The components of the regeneration
30 system 200 are connected as shown.

- 12 -

The complex signal 100 is input, in parallel, to the signal correlator 24 and the frame and burst timing correlator 28. The frame and burst timing correlator 28 detects where GSM signal frames start and end in the signal 100 as well as the positions of training sequences and other components of the signal structure. This signal timing information is supplied to the correlator 24; the residual phase shift correlator 30 and the demodulator 40.

The signal correlator 24 uses the GSM training sequence in each burst to estimate the mean beat frequency by estimating the mean change in phase shift between successive bursts over the signal span of interest. The estimate 24A of the mean beat frequency is supplied to database 34. Output signal 102 is also passed to frequency mixer 32 from the signal correlator 24.

Frequency mixer 32 eliminates the beat frequency 24A from output signal 102 and provides an input signal 104 for the residual phase shift correlator 30.

The residual phase shift correlator 30 estimates residual "noise-like" phase shift characteristics present on signal 104 and provides an estimate 30A of the residual phase shift (one measurement for each GSM burst) for the database 34. Signal 106 is also provided for mixer 42.

Mixer 42 removes the estimate 30A of the residual phase shift and the resulting signal 108 is passed to the demodulator 40 which demodulates the signal 108. Demodulated data symbols 40A are sent to database 34.

Demodulator 40 may use a number of techniques which may include the following: hard decision, which has the effect of suppressing interference; and/or error correction techniques (eg Vitterbi correction).

It will be understood that the particular type of demodulation technique or error correction applied will depend on the implementation as well as the content and structure of the signal.

Signals 24A, 30A and 40A sent to the database 34 are subsequently reassembled to a regenerated reference signal as explained below.

Pre-defined symbol sequences within the GSM protocol permit error detection and correction of known sections of the demodulated symbol stream. Such sequences that may be required in the present invention are stored in database or on look-up table 34. These sequences are used to measure
5 symbol errors rate and correct erroneous data symbols in signal 24A. Reconstruction of the transmitted signal is then performed using the corrected symbol stream in conjunction with the frequency and phase information contained in 24A and 30A.

Database 34 supplies symbols to the error corrector 46 and information
10 relating to the beat frequency and residual phase shifts to the remodulator 50 respectively. The bit error corrector 46, GSM modulator 48 and the remodulator 50 enable and control access to the database 34 so that bit errors can be detected and corrected; the corrected data symbol stream can be modulated; and the residual phase shifts and the mean beat frequency estimates can be re-
15 applied so as to provide a zero beat frequency version of the GSM signal as originally transmitted.

Reapplication of the mean beat frequency and residual phase shifts is essential in order to obtain an accurate approximation to the originally transmitted signal 20 converted to zero beat frequency, with respect to the
20 stable local oscillator in the receiver. Consequently, as near an approximation to the original signal 20 is therefore obtained.

A bit corrector 46 accesses the signal database 34 and downloads stored data. In certain known portions of the GSM signal corrupted symbols are replaced with defined symbols held in look-up tables in the memory of the
25 database 34. A comparison of known portions of the received signal (for example, sync sequences and dummy bursts) in the database with signals from a look-up enables an estimate of the symbol error rate in the received signal to be made. The resultant bit-stream is then effectively a best estimate of the symbols that were originally transmitted.

30 The best estimate of transmitted data symbol stream is fed to GSM modulator 48 to create a modulated corrected signal 48A, which is then passed

to a remodulator 50. Remodulator 50 accesses the database 34 and re-applies the residual phase shift 24A and mean beat frequency estimate 30A. The regenerated GSM reference signal is then output from the remodulator 50 as signal 150.

- 5 By remodulating the demodulated GSM signals and re-applying the mean beat frequency and residual phase shift corrections, a high quality regenerated replica of the signal from the transmitter referred to the nominal zero beat frequency of the receiver.

10 It will be appreciated that, if the structure of the signal is known *a priori*, it a simple substitution of the relevant element for correction can be implemented from the database or look-up table 34. Alternatively, the correction is effected during subsequent processing.

15 Accordingly, therefore in summary, a signal regenerator receives a corrupted signal, uses a set of known signal sequences (eg sync and training sequences) to determine the signal timing and to correlate the signal. The mean beat frequency is estimated, mixed out and stored in a database. The residual phase shifts are then estimated and stored in a database. A symbol stream is derived by suitable demodulation techniques and the symbol stream is stored in a database. Stored information is extracted from the database to
20 measure and correct symbol errors GSM modulate the corrected symbol stream and remodulate the residual phase shifts and mean beat frequency.

 The invention therefore reduces and ideally removes signal corruptions arising from effects such as multi-path dispersion, interference and noise.

25 The method described above with reference to Figure 2 is carried out on each burst within the signal to be regenerated so that data is obtained for each burst. Figure 3 illustrates a portion of a table of data obtained from a trial using the signal regeneration system shown in Figure 2 (for burst numbers 293 to 348). The data indicates, for each burst within the signal, the burst number, the burst offset in the storage database, a flag field used for internal control
30 purposes, the training sequence identifier (8 = "dummy"), the initially measured burst phase and the residual phase shift after mean beat frequency correction.

- 15 -

Figure 4 shows a composite phase shift versus burst count graph constructed from the table shown in Figure 3. Each point on the graph corresponds to the residual phase shift measurement from one burst.

It will be appreciated that variation may be made to the preferred
5 embodiment without departing from the scope of the invention.

CLAIMS

1. A method of regenerating a remotely transmitted signal comprising a symbol stream modulated onto a carrier in accordance with a predetermined standard, the method including the steps of:
 - 5 a) receiving the remotely transmitted signal having known characteristics;
 - b) determining frame timing of the received signal;
 - c) identifying the locations of sequences within the signal from the frame timing;
 - 10 d) identifying the structure of the sequences;
 - e) estimating phase shift values at the locations of the sequences;
 - f) demodulating the symbol stream using the estimated phase shift values and the structure of the sequences; and
 - g) remodulating the symbol stream using the phase shift values.
- 15 2. A method according to claim 1, wherein step f) comprises the additional step of correcting the symbol stream prior to step g).
3. A method according to claim 2, wherein the step of correcting the symbol stream incorporates substitution of symbols in the symbol stream where the symbol stream is known *a priori*.
- 20 4. A method according to any one of the preceding claims, wherein step f) further comprises comparing demodulated symbols with known symbols to provide an estimate of the symbol error rate.
5. A method according to any one of the preceding claims, wherein step a) includes down converting the received signal to a nominal 0Hz
25 intermediate frequency.

- 17 -

6. A method according to claim 5, wherein step a) further includes digitising the intermediate frequency signal to provide a digitised symbol stream in a complex signal domain.
- 5 7. A method according to any one of the preceding claims, wherein step e) includes estimating mean beat frequency of the signal, removing the estimated mean beat frequency from the signal and storing the mean beat frequency in a database.
- 10 8. A method according to claim 7, wherein step e) further includes estimating residual phase shift of the signal and storing the estimated residual phase shift of the signal in the database.
9. A method according to any one of the preceding claims, wherein the sequences include training sequences, synchronisation signals, frequency correction bursts, or dummy bursts.
- 15 10. A method according to claim 9, wherein the training sequences include eight training sequences associated with data bursts.
11. A method according to claim 10, wherein the training sequences include a ninth training sequence associated with dummy bursts.
12. A method according to claim 10 or 11, further including the step of using training sequences and correlation peaks for multi-path compensation.
- 20 13. A method according to claim 12, wherein channel estimation of data sequences are used for multi-path compensation.

ABSTRACT

SIGNAL REGENERATION


Described herein is a method for signal regeneration, particularly, of the signal type transmitted by cellular base stations used in cellular telephone network systems. It is sometimes necessary to regenerate an accurate replica of a transmitted signal, by removing any errors that are present and/or compensate for any degradation that occur during transmission. The signal structure of signals transmitted within the cellular network systems is of a known form with predefined characteristics such as synchronisation signals, error correction bursts or training sequences. The method includes determining frame timing of the received signal, identifying the locations of sequences within the signal from the frame timing, identifying the structure of the sequences, estimating phase shift values at the locations of the sequences, demodulating the symbol stream using the estimated phase shift values and the structure of the sequences, correcting symbol errors by various techniques and remodulating the symbol stream using the phase shift values to regenerate the signal that is substantially identical to the one that would have been received directly from the transmitter over a high quality land-line.

20


(Fig. 2)

1/4

Fig. 1.

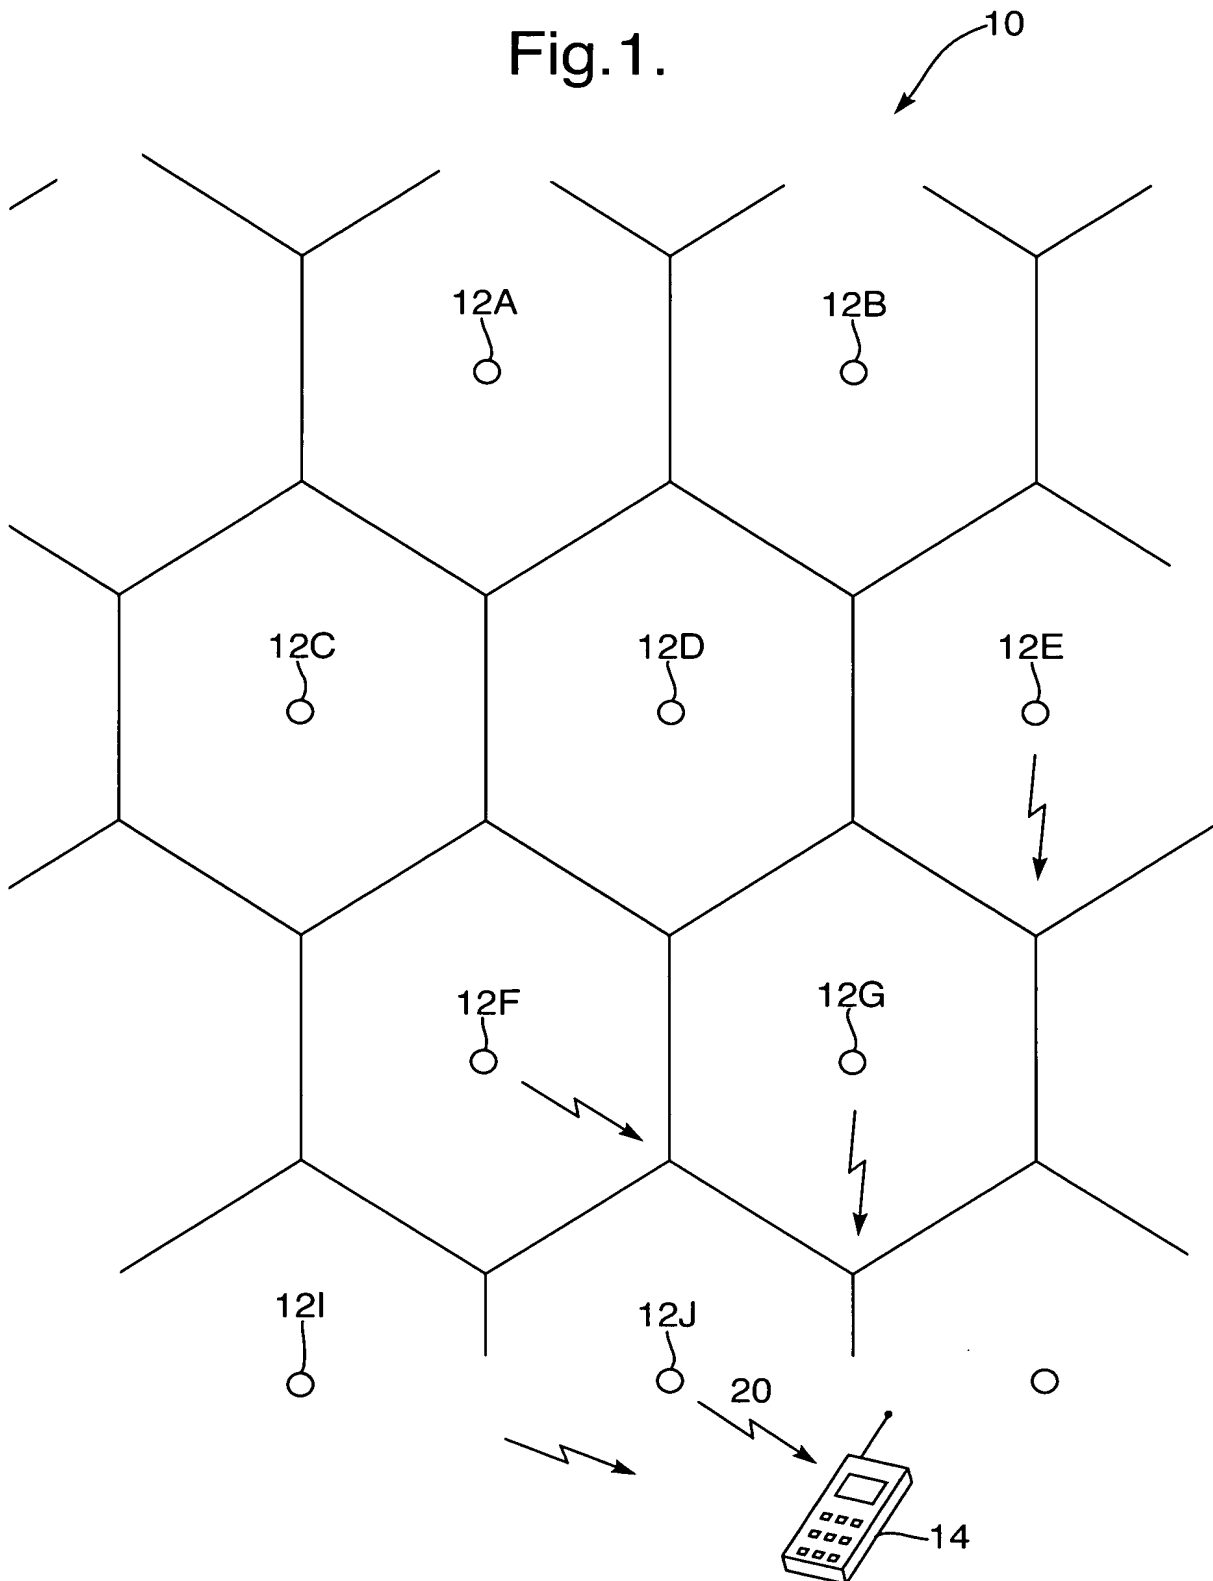

2/4

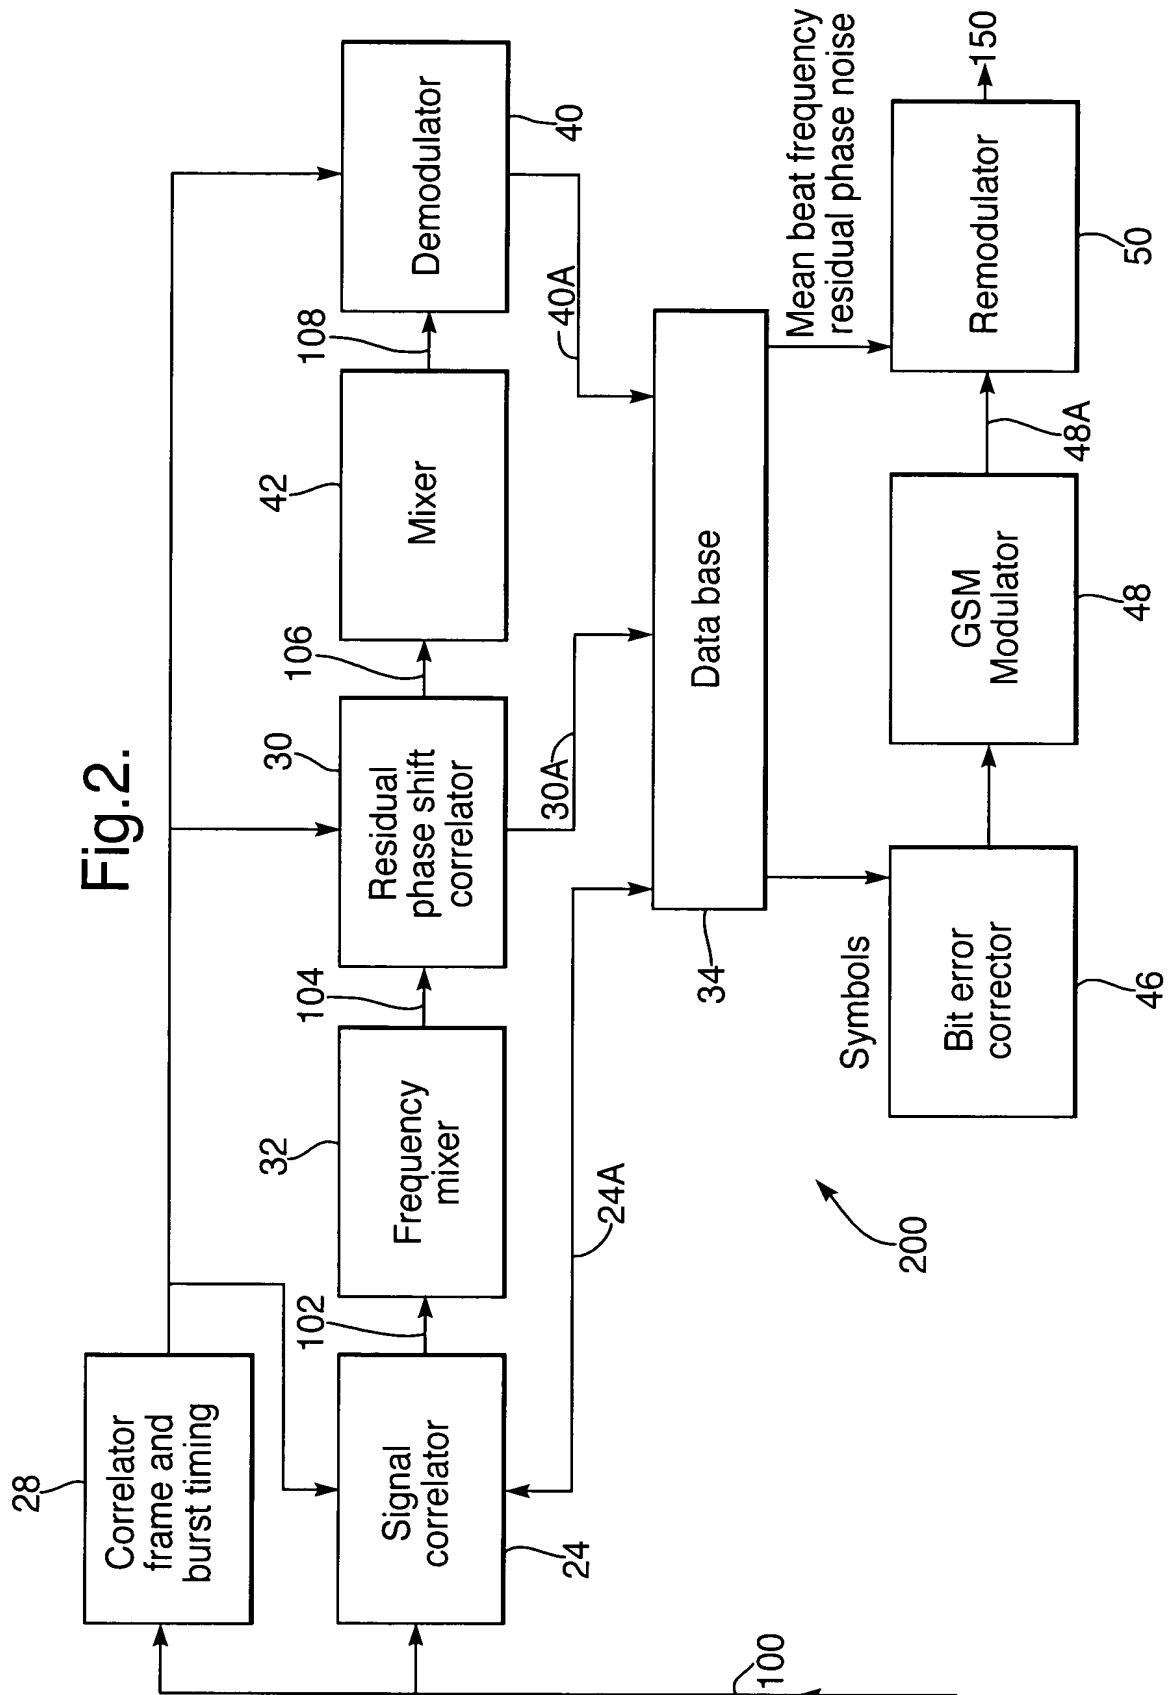


3/4

Fig.3.

Count	Offset	Flags	TS	Phase	Demodulated phase
293	45913 FCB		8	356.1	276
294	46070	18	8	240.5	280.7
295	46226	16	8	208.4	278.6
296	46382	16	8	180	280.2
297	46538	17	8	148.7	278.9
298	46695	18	8	30.3	280.6
299	46851	16	8	2.6	282.9
300	47007	16	8	329.4	279.8
301	47163 SYNC		8	296.7	279.8
302	47320	18	8	177.3	277.9
303	47476	16	8	149.1	279.7
304	47632	16	8	118.1	278.6
305	47788	17	8	84.9	275.5
306	47945	18	8	327.4	278.2
307	48101	16	8	298.2	278.9
308	48257	16	8	264.9	275.7
309	48413	17	7	55.4	276.3
310	48570	18	8	115.5	276.4
311	48726	16	8	85.3	276.3
312	48882	16	8	55.3	276.2
313	49038	17	7	208.2	279.3
314	49195	18	7	84.8	276
315	49351	16	8	236	277.2
316	49507	16	8	209.4	280.6
317	49663	17	7	356.8	278.1
318	49820	18	8	54.7	276
319	49976	16	8	22.7	274.1
320	50132	16	8	351.4	272.8
321	50288	17	8	323.9	275.2
322	50445	18	8	203.2	274.7
323	50601	16	8	176.3	277.9
324	50757	16	8	142	273.5
325	50913	17	7	294.4	276
326	51070	18	8	353	274.8
327	51226	16	8	321.3	273.1
328	51382	16	8	290.8	272.5
329	51538	17	8	264.1	275.8
330	51695	18	8	145.3	277.3
331	51851	16	8	111.7	273.7
332	52007	16	8	82.4	274.4
333	52163	17	7	231.7	273.7
334	52320	18	8	293.1	275.2
335	52476	16	8	264.4	276.6
336	52632	16	8	230.7	272.9
337	52788	17	7	22.7	274.9
338	52945	18	7	262.4	274.8
339	53101	16	8	51.1	273.5
340	53257	16	8	21.1	273.5
341	53413	17	7	170.7	273.2
342	53570	18	8	229.2	271.8
343	53726	16	8	198.9	271.5
344	53882	16	8	171.2	273.7
345	54038	17	8	140.4	273
346	54195	18	8	20.8	273.6
347	54351	16	8	351.3	274.1
348	54507	16	8	318.7	271.5

4/4

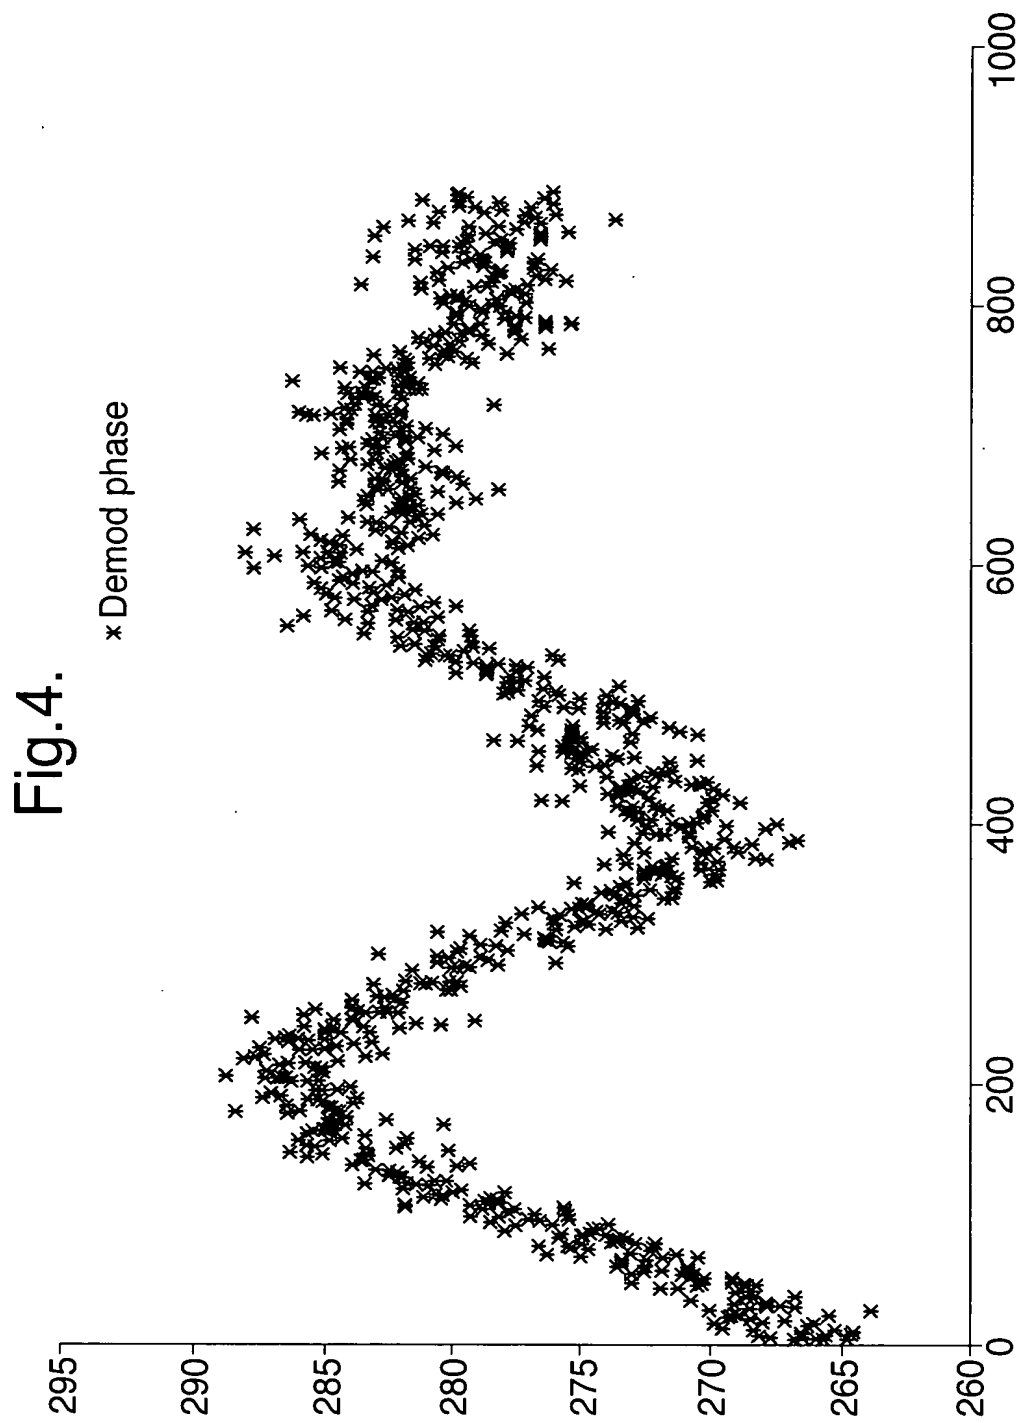

INTERNATIONAL SEARCH REPORT

GB2004/004910

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B1/40 H04B7/155 H04L27/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP 1 501 215 A (TELEFONICA, S.A) 26 January 2005 (2005-01-26) abstract; claims 13,26; figures 2-6 paragraphs '0005!, '0006!, '0013!, '0024!, '0026!, '0028!, '0029!, '0031!, '0033!, '0038! - '0041!	1-13
X	& WO 03/088524 A (TELEFONICA, S.A) 23 October 2003 (2003-10-23)	1,7,8
Y		2-6,9-13
Y	WO 03/094417 A (ATHEROS COMMUNICATIONS, INC) 13 November 2003 (2003-11-13) abstract; claims 1,5,6; figures 2-5,7	2-6,9-13
Y	US 5 440 265 A (COCHRAN ET AL) 8 August 1995 (1995-08-08) abstract; claims 1,6-8; figures 4,6,7 column 5, line 30 - line 43	2-6,9-13
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

17 March 2005

Date of mailing of the international search report

30/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wolters, R

INTERNATIONAL SEARCH REPORT

GB2004/004910

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 52 136527 A (MATSUSHITA ELECTRIC IND CO LTD) 15 November 1977 (1977-11-15) the whole document -----	1,7,8
A	US 4 947 409 A (RAITH ET AL) 7 August 1990 (1990-08-07) abstract; claims 1,2,4; figures 3,4 column 1, line 64 - column 2, line 13 column 2, line 48 - line 63 column 3, line 26 - line 59 column 4, line 9 - line 63 column 5, line 57 - column 6, line 10 -----	1,7,8
A	US 5 852 629 A (IWAMATSU ET AL) 22 December 1998 (1998-12-22) abstract; claims 1,2; figures 1-3,6,9,10 column 1, line 34 - line 55 column 2, line 17 - column 3, line 16 -----	1,7,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

GB2004/004910

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1501215	A	26-01-2005	ES 2198207 A1 AU 2003224164 A1 EP 1501215 A1 WO 03088524 A1	16-01-2004 27-10-2003 26-01-2005 23-10-2003
WO 03088524	A	23-10-2003	ES 2198207 A1 AU 2003224164 A1 EP 1501215 A1 WO 03088524 A1	16-01-2004 27-10-2003 26-01-2005 23-10-2003
WO 03094417	A	13-11-2003	AU 2003225894 A1 WO 03094417 A1	17-11-2003 13-11-2003
US 5440265	A	08-08-1995	NONE	
JP 52136527	A	15-11-1977	JP 1068420 C JP 56007639 B AU 501404 B2 AU 2476877 A CA 1085047 A1 DE 2720801 A1 GB 1577052 A US 4122491 A	23-10-1981 18-02-1981 21-06-1979 09-11-1978 02-09-1980 17-11-1977 15-10-1980 24-10-1978
US 4947409	A	07-08-1990	SE 460086 B SE 8704742 A	04-09-1989 28-05-1989
US 5852629	A	22-12-1998	JP 3337795 B2 JP 7162465 A	21-10-2002 23-06-1995